

SLING LANYARD

W2016



Lanyard + anchor device

CE 1019

EN354:10, EN795B:12
EN358:99




- 60cm
- 80cm
- 120cm
- 150cm

Code	[cm]	[in]	[kN]	type
W2016*060	60	24	22	
W2016*080	80	32	22	
W2016*120	120	48	22	
W2016*150	150	60	22	

Directive: PSA 89/686/EEC
Směrnice: Nařízení vlády 21/2003 Sb.
Certified by / Certifikoval:
VVUÚ, a.s. Ostrava-Radvanice

EC QMS of production
inspected by:
ES SŘJ výroby prověřuje:
VVUÚ, a.s. Ostrava-Radvanice
Pikartská 1337/7, ČR





Reading and understanding instruction for use are required to use this product!
Bez důkladného pročtení a pochopení návodu k použití nepoužívejte tento výrobek




3 years guarantee
3 roky záruka

Fall arrester system

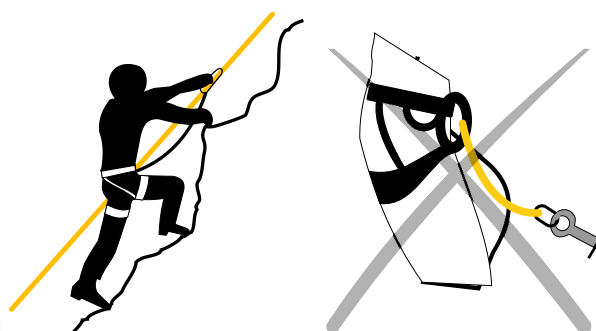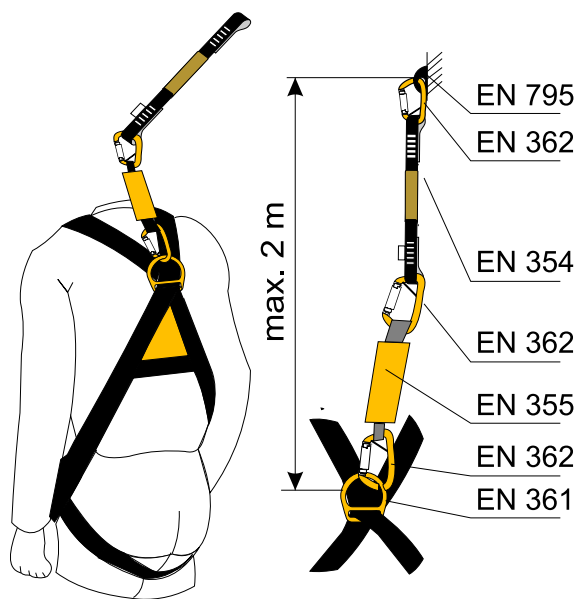

Examples how to use sling lanyard EN 795B

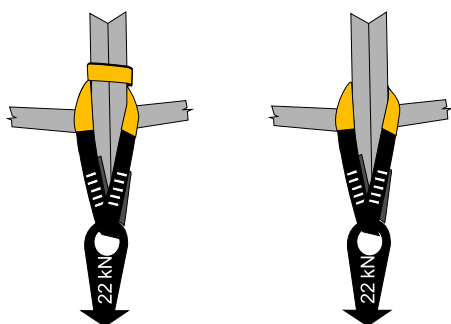

If a sling is damaged, the white signal colour is visible!
Attention: promptly stop using the sling as the sling could be dangerous!!!



singing rock